

Chromata Base

TECHNICAL SPECIFICATION

Manufacturing method	: Level loop
Pile type	: Loop pile
Pile fibre	: 100% polyamide 6 piece-dyed
Gauge	: 1/10"
Pile weight	: 600 gr/m ²
Pile height	: 3.5 mm
Total weight	: 4000 gr/m ²
Total thickness	: 6.3 mm
Tuft density	: 244.100/m ²
Tile size	: 50 x 50 cm
Backing	: Polyflex
Tiles per box	: 20

PERFORMANCE

Use classification		: 23 + 33
Caster chair test	EN 985	: A, intensive use
Abrasion	EN 1963	: Pass
Vettermann test	EN 1471	: Pass
Dimensional stability	EN 986	: Pass
Thermal isolation	ISO 8302	: 0.0567 m ² K/W
Sound absorption	ISO 140-8	: 22 dB
Luxery class		: LC2
DOP-nr		: 1016-2612
Prodis-nr		: 61017F4E

ELECTROSTATIC


Static loading		: Anti-static
Walking test	EN 1815	: ≤ 0.02 KV
Horizontal resistance	ISO 1096 5	: 8 x 10. ⁹ Ohm
Vertical resistance	ISO 1096 5	: 4 x 10. ⁹ Ohm

FLAMMABILITY

Reaction to fire	EN ISO 9239-1	: Bfl-s1
Reaction to fire	BS 4790	: Medium radius of effect of ignition

COLOUR FASTNESS

Light	ISO 105 B02	: 6.0 - 7.0
Rubbing	ISO 105 x12	: 4.0 - 5.0
Water	ISO 105 E01	: 4.0 - 5.0

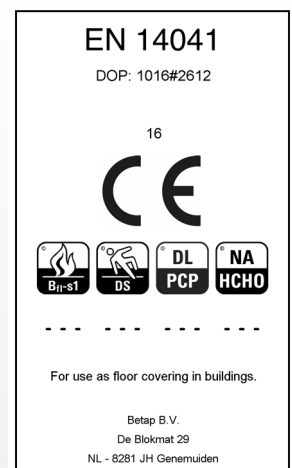

MAINTENANCE

Regular vacuum cleaning is essential. Spills and surface stains can be removed by sponging with a damp cloth, or for more resistant stains, with a mild detergent solution.