

# Chromata Cascade


## TECHNICAL SPECIFICATION

|                      |                                  |
|----------------------|----------------------------------|
| Manufacturing method | : Level loop                     |
| Pile type            | : Loop pile                      |
| Pile fibre           | : 100% polyamide 6<br>piece-dyed |
| Gauge                | : 1/10"                          |
| Pile weight          | : 660 gr/m <sup>2</sup>          |
| Pile height          | : 4.0 mm                         |
| Total weight         | : 4900 gr/m <sup>2</sup>         |
| Total thickness      | : 6.2 mm                         |
| Tuft density         | : 156.000/m <sup>2</sup>         |
| Tile size            | : 25 x 100 cm                    |
| Backing              | : Polyflex                       |
| Tiles per box        | : 10                             |



## PERFORMANCE

|                       |                                      |
|-----------------------|--------------------------------------|
| Use classification    | : 23 + 33                            |
| Caster chair test     | EN 985 : A, intensive use            |
| Abrasion              | EN 1963 : Pass                       |
| Vettermann test       | EN 1471 : Pass                       |
| Dimensional stability | EN 986 : Pass                        |
| Thermal isolation     | ISO 8302 : 0.0599 m <sup>2</sup> K/W |
| Sound absorption      | ISO 140-8 : 25 dB                    |
| Luxury class          | : LC2                                |
| DOP-nr                | : 1016-2612                          |
| Prodis-nr             | : 61017F4E                           |

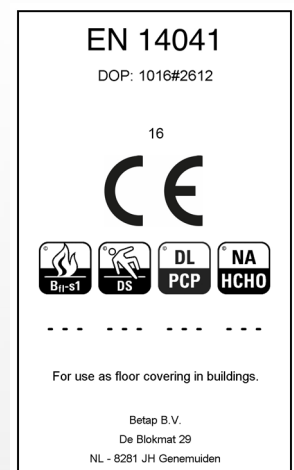

## ELECTROSTATIC

|                       |   |
|-----------------------|---|
| Static loading        | : Anti-static                           |
| Walking test          | EN 1815 : 2.0 kV                        |
| Horizontal resistance | ISO 1096 5 : 5.9 x 10. <sup>9</sup> Ohm |
| Vertical resistance   | ISO 1096 5 : 4.7 x 10. <sup>9</sup> Ohm |

## FLAMMABILITY

|                  |   |
|------------------|---|
| Reaction to fire | EN ISO 9239-1 : Bfl-s1                        |
| Reaction to fire | BS 4790 : Low radius of<br>effect of ignition |

## COLOUR FASTNESS

|         |                         |
|---------|-------------------------|
| Light   | ISO 105 B02 : 5.0       |
| Rubbing | ISO 105 x12 : 4.0 - 5.0 |
| Water   | ISO 105 E01 : 4.0 - 5.0 |



## MAINTENANCE

Regular vacuum cleaning is essential. Spills and surface stains can be removed by sponging with a damp cloth, or for more resistant stains, with a mild detergent solution.