

# Chromata Style

## TECHNICAL SPECIFICATION

Manufacturing method	: Design tufted
Pile type	: Loop pile
Pile fibre	: 100% polyamide 6 piece-dyed
Gauge	: 1/10"
Pile weight	: 650 gr/m <sup>2</sup>
Pile height	: 3.0 - 6.0 mm
Total weight	: 4200 gr/m <sup>2</sup>
Total thickness	: 5.8 - 8.8 mm
Tuft density	: 177.200/m <sup>2</sup>
Tile size	: 50 x 50 cm
Backing	: Polyflex
Tiles per box	: 20

## PERFORMANCE

Use classification	: 23 + 33
Caster chair test	EN 985 : A, intensive use
Abrasion	EN 1963 : Pass
Vettermann test	EN 1471 : Pass
Dimensional stability	EN 986 : Pass
Thermal isolation	ISO 8302 : 0.0672 m <sup>2</sup> K/W
Sound absorption	ISO 140-8 : 26 dB
Luxury class	: LC2
DOP-nr	: 1016-2612
Prodis-nr	: 7D6C94A0

## ELECTROSTATIC


Static loading	: Anti-static
Walking test	EN 1815 : ≤ 0.02 KV
Horizontal resistance	ISO 1096 5 : 8 x 10. <sup>9</sup> Ohm
Vertical resistance	ISO 1096 5 : 4 x 10. <sup>9</sup> Ohm

## FLAMMABILITY

Reaction to fire	EN ISO 9239-1 : Bfl-s1
Reaction to fire	BS 4790 : Medium radius of effect of ignition

## COLOUR FASTNESS

Light	ISO 105 B02 : 6.0
Rubbing	ISO 105 x12 : 5.0
Water	ISO 105 E01 : 4.0 - 5.0

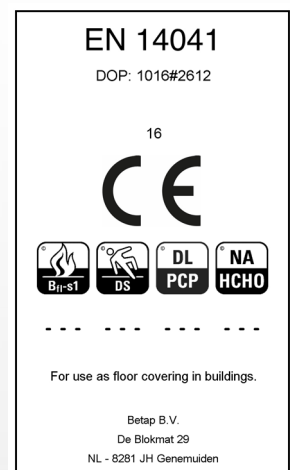

## MAINTENANCE

Regular vacuum cleaning is essential. Spills and surface stains can be removed by sponging with a damp cloth, or for more resistant stains, with a mild detergent solution.