

Chromata Feel

TECHNICAL SPECIFICATION

Manufacturing method	: Shaggy
Pile type	: Cut pile
Pile fibre	: 100% polyamide 6.6 piece-dyed
Gauge	: 5/16"
Pile weight	: 1200 gr/m ²
Pile height	: 21.0 mm
Total weight	: 4710 gr/m ²
Total thickness	: 23.8 mm
Tuft density	: 42.840/m ²
Tile size	: 50 x 50 cm
Backing	: Polyflex
Tiles per box	: 16

PERFORMANCE

Use classification		: 23 + 33
Caster chair test	EN 985	: B, occasional use
Abrasion	EN 1963	: Pass
Vettermann test	EN 1471	: Pass
Dimensional stability	EN 986	: Pass
Thermal isolation	ISO 8302	: 0.157 m ² K/W
Sound absorption	ISO 140-8	: 28 dB
Luxery class		: LC4
DOP-nr		: 1016-2612
Prodis-nr		: 4EAAA9D4

ELECTROSTATIC


Static loading		: Anti-static
Walking test	EN 1815	: ≤ 0.02 KV
Horizontal resistance	ISO 1096 5	: 2.2 x 10. ¹¹ Ohm
Vertical resistance	ISO 1096 5	: 1.4 x 10. ¹⁰ Ohm

FLAMMABILITY

Reaction to fire	EN ISO 9239-1	: Bfl-s1
Reaction to fire	BS 4790	: Low radius of effect of ignition

COLOUR FASTNESS

Light	ISO 105 B02	: 5.0
Rubbing	ISO 105 x12	: 4.0 - 5.0
Water	ISO 105 E01	: 4.0 - 5.0

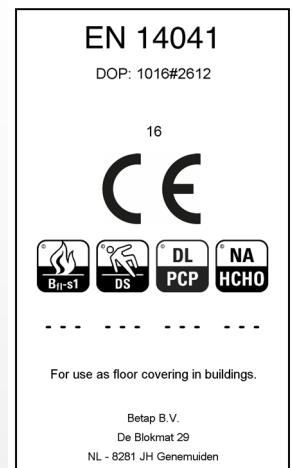

MAINTENANCE

Regular vacuum cleaning is essential. Spills and surface stains can be removed by sponging with a damp cloth, or for more resistant stains, with a mild detergent solution.