

# City Life 1000

## TECHNICAL SPECIFICATION

Manufacturing method	: Saxony
Pile type	: Cut pile
Pile fibre	: 100% polyamide 6 Solution-dyed
Gauge	: 1/8"
Pile weight	: 950 gr/m <sup>2</sup>
Pile height	: 6.5 mm
Total weight	: 1850 gr/m <sup>2</sup>
Total thickness	: 8.5 mm
Tuft density	: 148.050/m <sup>2</sup>
Roll width	: 400 cm
Backing	: Actionback



## PERFORMANCE

Use classification	: 23 + 32
Caster chair test	EN 985 : A, intensive use
Abrasion	EN 1963 : Pass
Vettermann test	EN 1471 : Pass
Dimensional stability	EN 986 : Pass
Thermal isolation	ISO 8302 : 0.127 m <sup>2</sup> K/W
Sound absorption	ISO 140-8 : 26 dB
Luxury class	: LC3
DOP-nr	: 1016-3612
Prodis-nr	: In application

## ELECTROSTATIC



Static loading	: Anti-static
Walking test	EN 1815 : ≤ 0.02 KV
Horizontal resistance	ISO 1096 5 : 3.9 x 10. <sup>11</sup> Ohm
Vertical resistance	ISO 1096 5 : 8.4 x 10. <sup>10</sup> Ohm

## FLAMMABILITY

Reaction to fire	EN ISO 9239-1 : Cfl-s1
Reaction to fire	BS 4790 : Low radius of effect of ignition

## COLOUR FASTNESS

Light	ISO 105 B02 : 7.0 - 8.0
Rubbing	ISO 105 x12 : 4.0 - 5.0
Water	ISO 105 E01 : 4.0 - 5.0

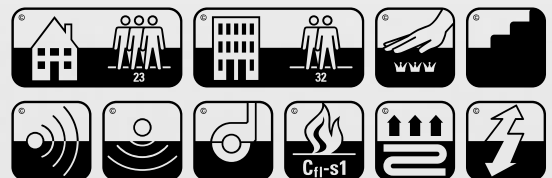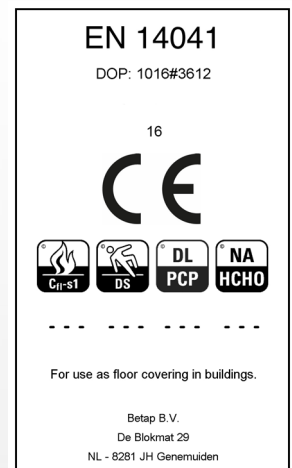

## MAINTENANCE

Regular vacuum cleaning is essential. Spills and surface stains can be removed by sponging with a damp cloth, or for more resistant stains, with a mild detergent solution.