

Club

TECHNICAL SPECIFICATION

| | | |
|----------------------|----------|----------------------------------|
| Manufacturing method | | : Design tufted |
| Pile type | | : Loop pile |
| Pile fibre | | : 100% polyamide 6 solution-dyed |
| Gauge | | : 1/10" |
| Pile weight | | : 620 gr/m ² |
| Pile height | ISO 1766 | : 3.0 - 6.0 mm |
| Total weight | | : 4200 gr/m ² |
| Total thickness | ISO 1765 | : 5.8 - 8.8 mm |
| Tuft density | | : 177.200/m ² |
| Tile size | | : 100 x 25 cm |
| Backing | | : Polyflex |
| Tiles per box | | : 10 |

PERFORMANCE

| | | |
|-----------------------|-----------|----------------------------|
| Use classification | | : 23 + 33 |
| Caster chair test | EN 985 | : A, intensive use |
| Abrasion | EN 1963 | : Pass |
| Vettermann test | EN 1471 | : Pass |
| Dimensional stability | EN 986 | : Pass |
| Thermal isolation | ISO 8302 | : 0.079 m ² K/W |
| Sound absorption | ISO 140-8 | : 26 dB |
| Luxury class | | : LC2 |
| DOP-nr | | : 1016-2612 |
| Prodis-nr | | : 19E387EF |

ELECTROSTATIC

| | | |
|-----------------------|------------|----------------------------|
| Static loading | | : Anti-static |
| Walking test | EN 1815 | : 0.6 kV |
| Horizontal resistance | ISO 1096 5 | : 8 x 10. ⁹ Ohm |
| Vertical resistance | ISO 1096 5 | : 4 x 10. ⁹ Ohm |


FLAMMABILITY

| | | |
|------------------|---------------|---------------------------------------|
| Reaction to fire | EN ISO 9239-1 | : Bfl-s1 |
| Reaction to fire | BS 4790 | : Medium radius of effect of ignition |

COLOUR FASTNESS

| | | |
|---------|-------------|-------------|
| Light | ISO 105 B02 | : 7.0 - 8.0 |
| Rubbing | ISO 105 x12 | : 4.0 - 5.0 |
| Water | ISO 105 E01 | : 4.0 - 5.0 |

ECONYL[®]
Made with 100% Regenerated Nylon

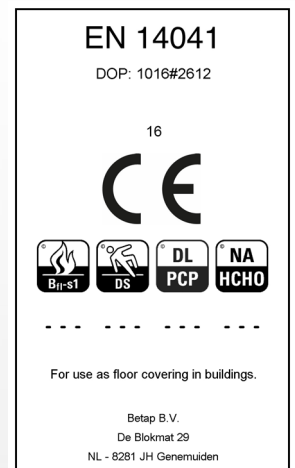

MAINTENANCE

Regular vacuum cleaning is essential. Spills and surface stains can be removed by sponging with a damp cloth, or for more resistant stains, with a mild detergent solution.