

Lake

TECHNICAL SPECIFICATION

Manufacturing method		: Design tufted
Pile type		: Loop pile
Pile fibre		: 100% polyamide 6 solution-dyed
Gauge		: 1/10"
Pile weight		: 620 gr/m ²
Pile height	ISO 1766	: 3.0 - 6.0 mm
Total weight		: 4200 gr/m ²
Total thickness	ISO 1765	: 5.8 - 8.8 mm
Tuft density		: 177.200/m ²
Tile size		: 100 x 25 cm
Backing		: Polyflex
Tiles per box		: 10

PERFORMANCE

Use classification		: 23 + 33
Caster chair test	EN 985	: A, intensive use
Abrasion	EN 1963	: Pass
Vettermann test	EN 1471	: Pass
Dimensional stability	EN 986	: Pass
Thermal isolation	ISO 8302	: 0.079 m ² K/W
Sound absorption	ISO 140-8	: 26 dB
Luxury class		: LC2
DOP-nr		: 1016-2612
Prodis-nr		: 19E387EF

ELECTROSTATIC

Static loading		: Anti-static
Walking test	EN 1815	: 0.6 kV
Horizontal resistance	ISO 1096 5	: 8 x 10. ⁹ Ohm
Vertical resistance	ISO 1096 5	: 4 x 10. ⁹ Ohm


FLAMMABILITY

Reaction to fire	EN ISO 9239-1	: Bfl-s1
Reaction to fire	BS 4790	: Medium radius of effect of ignition

COLOUR FASTNESS

Light	ISO 105 B02	: 7.0 - 8.0
Rubbing	ISO 105 x12	: 4.0 - 5.0
Water	ISO 105 E01	: 4.0 - 5.0

ECONYL[®]
Made with 100% Regenerated Nylon

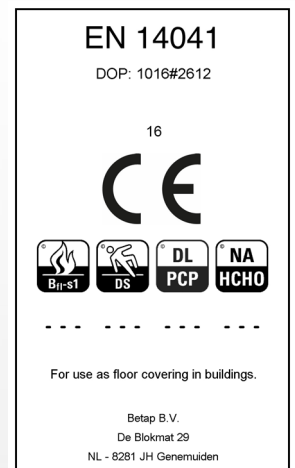

MAINTENANCE

Regular vacuum cleaning is essential. Spills and surface stains can be removed by sponging with a damp cloth, or for more resistant stains, with a mild detergent solution.