

Larix

Technical Specifications

Manufacturing method	:	Tufted
Pile type	:	Loop pile
Pile fibre	:	100% PA SD
Gauge	:	5/32"
Pile weight	:	600 gr/m ²
Pile height	:	3.2 mm
Total weight	:	4200 gr/m ²
Total thickness	:	6.8 mm
Tuft density	:	124.800 m ²
Tile size	:	50 x 50 cm
Backing	:	Polyflex
Tiles per box	:	20

Performance

Use classification	EN 1307	:	23/33
Caster chair test	EN 985	:	A, Intensive use
Abrasion	EN 1963	:	Pass
Vettermann test	EN 9405	:	Pass
Dimensional stability	EN 986	:	Pass
Thermal isolation	ISO 8302	:	0.17 M ² K/W
Luxury class	EN 1307	:	LC2
Prodisnr.		:	D5B5C3F9

Electrostatic

Static loading	:	Anti-static
----------------	---	-------------

Flammability

Reaction to fire EN ISO 13501-1	:	Bfl-s1
---------------------------------	---	--------

Acoustics



Sound absorption EN ISO 10140	:	0.15
Impact sound insulation EN ISO 354	:	24 dB

Maintenance

Regular vacuum cleaning is essential. Spills and surface stains can be removed by sponging with a damp cloth, or for more resistant stains, with a mild detergent solution.



Discover more!

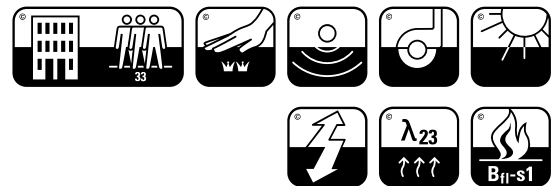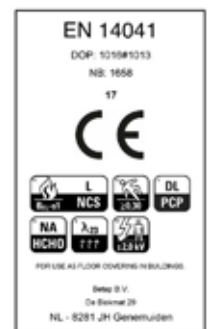

Betap has the right to alter each product specification in order to improve the carpet according to the newest technological applications.

