

Santo

Technical Specifications

| | |
|----------------------|---------------------------------------|
| Manufacturing method | : Myriad tufted |
| Pile type | : Loop pile |
| Pile fibre | : 100% polypropylene solution-dyed |
| Gauge | : 1/10" Myriad |
| Pile weight | : 600 gr/m ² |
| Pile height | : 3.2 mm |
| Total weight | : 3.125 gr/m ² |
| Total thickness | : 5.6 mm |
| Tuft density | : 200.900/m ² |
| Tile size | : 50 x 50 cm |
| Backing | : Polyflex |
| Tiles per box | : 20 |



Odkryj więcej!

Performance

| | |
|-----------------------|------------------------------------|
| Use classification | : 31 |
| Caster chair test | EN 985 : B, occasional use |
| Abrasion | EN 1963 : Pass |
| Vettermann test | EN 1471 : Pass |
| Dimensional stability | EN 986 : Pass |
| Thermal isolation | ISO 8302 : 0.10 m ² K/W |
| Luxury class | : LC1 |
| DOP-nr | : 1016-3012 |

Electrostatic



| | |
|----------------|---------------|
| Static loading | : Anti-static |
|----------------|---------------|

Flammability

| | |
|--------------------------------|---------------------------------------|
| Reaction to fire EN ISO 9239-1 | : Cfl-s1 |
| Reaction to fire BS 4790 | : Low radius of effect of ignition |

Colour fastness

| | | |
|---------|-------------|-------------|
| Light | ISO 105 B02 | : 7.0 – 8.0 |
| Rubbing | ISO 105 x12 | : 4.5 |

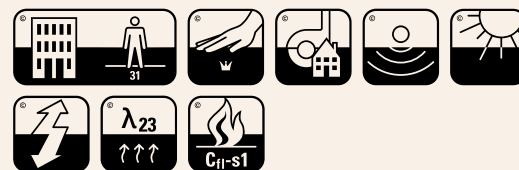

Maintenance

Regular vacuum cleaning is essential. Spills and surface stains can be removed by sponging with a damp cloth, or for more resistant stains, with a mild detergent solution.



Betap has the right to alter each product specification in order to improve the carpet according to the newest technological applications.

