

# Sierra

## Technical Specifications

Manufacturing method	: Level loop
Pile type	: Loop pile
Pile fibre	: 100% polypropylene solution-dyed
Gauge	: 1/10"
Pile weight	: 400 gr/m <sup>2</sup>
Pile height	: 2.9 mm
Total weight	: 2600 gr/m <sup>2</sup>
Total thickness	: 4.9 mm
Tuft density	: 193.550/m <sup>2</sup>
Tile size	: 50 x 50 cm
Backing	: Polyflex



Discover more!

made with  
**select** yarns®

## Performance

Use classification		: 23/31
Caster chair test	EN 985	: B, occasional use
Abrasion	EN 1963	: Pass
Vettermann test	EN 1471	: Pass
Dimensional stability	EN 986	: Pass
Thermal isolation	ISO 8302	: 0.10 m <sup>2</sup> K/W
Luxury class		: LC1
DOP-nr		: 1016-3012

## Electrostatic



Static loading	: Anti-static
----------------	---------------

## Flammability

Reaction to fire EN ISO 9239-1	: Cfl-s1
Reaction to fire BS 4790	: Low radius of effect of ignition

## Colour fastness

Light	ISO 105 B02	: 7.0 – 8.0
Rubbing	ISO 105 x12	: 4.5

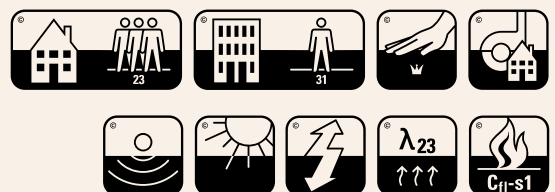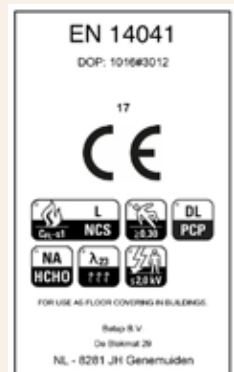

## Maintenance

Regular vacuum cleaning is essential. Spills and surface stains can be removed by sponging with a damp cloth, or for more resistant stains, with a mild detergent solution.



Betap has the right to alter each product specification in order to improve the carpet according to the newest technological applications.

**betap**®  
Flooring since 1918