



Sprinter Tile

Technical Specifications

Manufacturing method	: Nonwoven
Pile type	: 1-rib
Pile fibre	: 80% PP/20% rPET
Pile weight	: 475 gr/m ²
Pile height	: 2.0 mm
Total weight	: 3150 gr/m ²
Total thickness	: 5.0 mm
Tile size	: 50 x 50 cm
Backing	: Polyflex
Tiles per box	: 20



Discover more!

Performance

Use classification	EN 1307	: 32 + 23
Caster chair test	EN 985	: A, Intensive use
Abrasion	EN 1963	: Pass
Vettermann test	EN 9405	: Pass
Dimensional stability	EN 986	: Pass
Thermal isolation	ISO 8302	: 0.10 m ² K/W
Luxury class	EN 1307	: LC1
DOP-nr		: 1016-5013

Electrostatic



Static loading	: Anti-static
----------------	---------------

Flammability

Reaction to fire EN ISO 13501-1	: Bfl-s1
---------------------------------	----------

Colour fastness

Light	ISO 105 B02	: 7.0 – 8.0
Rubbing	ISO 105 x12	: 4.5

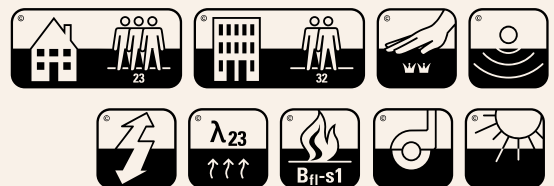

Maintenance

Regular vacuum cleaning is essential. Spills and surface stains can be removed by sponging with a damp cloth, or for more resistant stains, with a mild detergent solution.



Betap has the right to alter each product specification in order to improve the carpet according to the newest technological applications.

