

Transform

TECHNICAL SPECIFICATION

Manufacturing method	: Design tufted
Pile type	: Loop pile
Pile fibre	: 100% polyamide 6 solution-dyed
Gauge	: 1/10"
Pile weight	: 620 gr/m ²
Pile height	: 2.7 - 5.2 mm
Total weight	: 4200 gr/m ²
Total thickness	: 5.5 - 8.0 mm
Tuft density	: 177.200/m ²
Tile size	: 50 x 50 cm
Backing	: Polyflex
Tiles per box	: 20

PERFORMANCE

Use classification	: 23 + 33
Caster chair test	EN 985 : A, intensive use
Abrasion	EN 1963 : Pass
Vettermann test	EN 1471 : Pass
Dimensional stability	EN 986 : Pass
Thermal isolation	ISO 8302 : 0.0805 m ² K/W
Sound absorption	ISO 140-8 : 26 dB
Luxury class	: LC2
DOP-nr	: 1016-2612
Prodis-nr	: C59F4F8D

ELECTROSTATIC


Static loading	: Anti-static
Walking test	EN 1815 : ≤ 0.02 KV
Horizontal resistance	ISO 1096 5 : 8 x 10. ⁹ Ohm
Vertical resistance	ISO 1096 5 : 4 x 10. ⁹ Ohm

FLAMMABILITY

Reaction to fire	EN ISO 9239-1 : Bfl-s1
Reaction to fire	BS 4790 : Medium radius of effect of ignition


COLOUR FASTNESS

Light	ISO 105 B02 : 7.0 - 8.0
Rubbing	ISO 105 x12 : 5.0
Water	ISO 105 E01 : 4.0 - 5.0

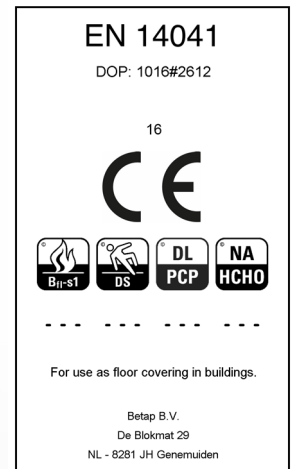

INSTALLATION

The installation of carpet tiles should always go according to the installation guide, provided by Betap.

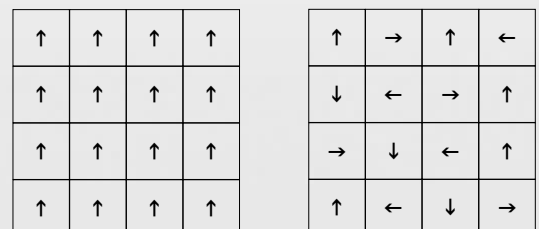

MAINTENANCE

Regular vacuum cleaning is essential. Spills and surface stains can be removed by sponging with a damp cloth, or for more resistant stains, with a mild detergent solution. For more detailed instructions, see the maintenance guide.