


Transmit


TECHNICAL SPECIFICATION

Manufacturing method	: Saxony
Pile type	: Cut pile
Pile fibre	: 100% polyamide 6 solution-dyed
Gauge	: 1/10"
Pile weight	: 1100 gr/m ²
Pile height	: 3.8 mm
Total weight	: 4300 gr/m ²
Total thickness	: 6.6 mm
Tuft density	: 173.800/m ²
Tile size	: 50 x 50 cm
Backing	: Polyflex
Tiles per box	: 20



PERFORMANCE

Use classification	: 23 + 33
Caster chair test	EN 985 : A, intensive use
Abrasion	EN 1963 : Pass
Vettermann test	EN 1471 : Pass
Dimensional stability	EN 986 : Pass
Thermal isolation	ISO 8302 : 0.07 m ² K/W
Sound absorption	ISO 140-8 : 24 dB
Luxery class	: LC4
DOP-nr	: 1016-2612
Prodis-nr	: 3DB08DC8

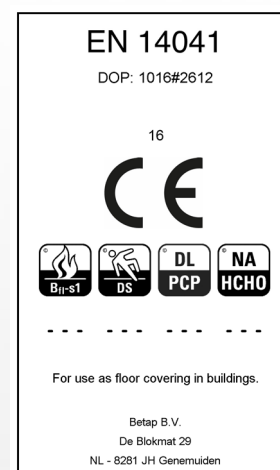

ELECTROSTATIC

Static loading	: Anti-static
Walking test	EN 1815 : 0.5 kV
Horizontal resistance	ISO 1096 5 : 3.19 x 10. ¹⁰ Ohm
Vertical resistance	ISO 1096 5 : 1.45 x 10. ¹⁰ Ohm

FLAMMABILITY

Reaction to fire	EN ISO 9239-1 : Bfl-s1
Reaction to fire	BS 4790 : Medium radius of effect of ignition

COLOUR FASTNESS

Light	ISO 105 B02 : 7.0 - 8.0
Rubbing	ISO 105 x12 : 5.0
Water	ISO 105 E01 : 5.0



MAINTENANCE

Regular vacuum cleaning is essential. Spills and surface stains can be removed by sponging with a damp cloth, or for more resistant stains, with a mild detergent solution.